

## Model HH-150 Electric

Size 8" x 6"

### Standard Features

- Hot Dip Galvanized Open Skids
- Fork Lift tubes
- Skid mounted with optional lifting bale
- Four corner bolt down angles
- Locking control panel
- Nu-T-Link compressor drive belt to allow easy belt replacement

### Pump Features

- Solids handling capabilities to 1.5" diameter maximum
- Continuous self priming
- Runs dry unattended
- Suction lift to 28ft.
- Skid mounted
- Stainless Steel, CD4MCu and Chrome pump options




Stainless Steel Pump End shown

### Technical

- Coupled to a 150HP 60Hz TEFC soft start hostile duty dual voltage (240/460V) motor
- 460 volt control panel equipped with motor protection
- UL Type 3L Control panel designed for outdoor duty
- Panel equipped with Terminal Blocks for 2 remote float switches (Low off, High on)
- 460V/240V-120V Fuse-Protected Control Circuit Transformer
- Compressor/Venturi automatic priming system

### Material Specifications

- Standard build – Ductile Iron volute, 316 Stainless Steel open impeller and replaceable wear plates.
- Pump shaft 431 stainless steel
- Mechanical Seal Solid silicon carbide mating faces Oil-bath lubrication for dry running
- Suction / discharge flanges ANSI 150# FF.

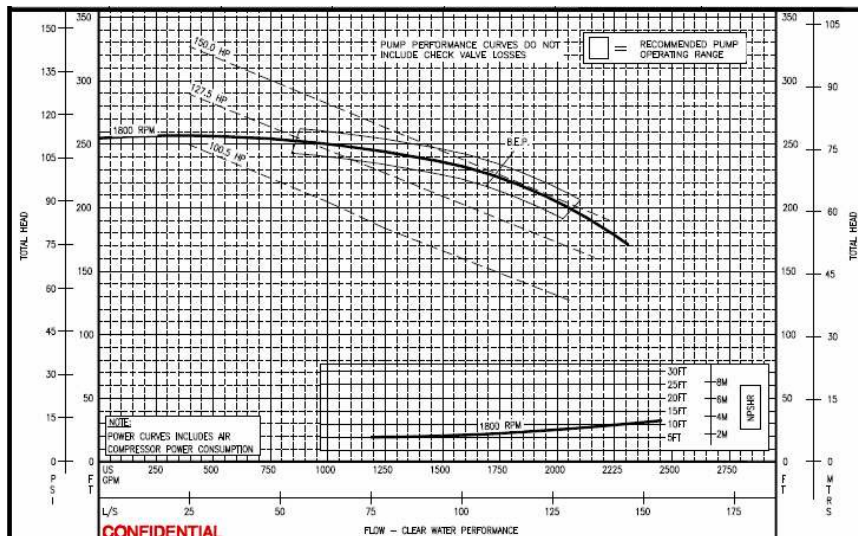

### POWER PRIME™ PUMPS

P.O. Box 2248  
 Bakersfield CA 93303  
 800 647-7246  
 661-399-9058  
 FAX 661-399-3374  
[www.powerprime.com](http://www.powerprime.com)  
[sales@powerprime.com](mailto:sales@powerprime.com)

Power Prime™ is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.